


Customer approval :

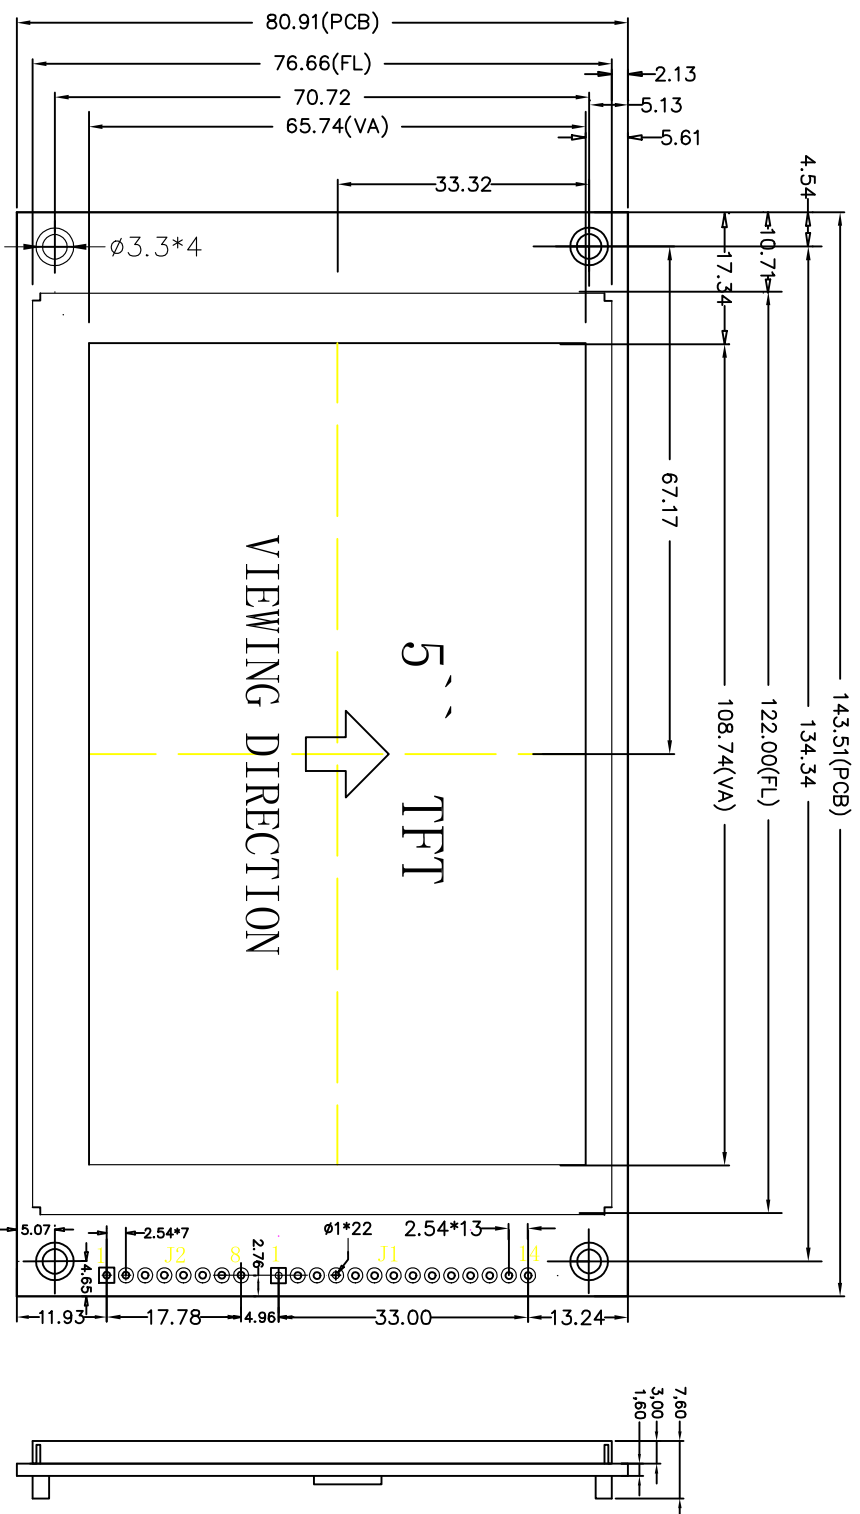

NO.	SYMBOL
1	GND
2	VCC
3	SCS#
4	SCLK
5	SD
6	SD1
7	RST
8	INT
9	DISP OFF
10	RTP-CLK
11	RTP-CS
12	RTP-DIN
13	RTP-DOUT
14	RTP-IRQ

J2(FLASH)

CONNECTION	PIN	SFCS0	SFCS1	SFDI	SFDO	SFCLK	VCC	GND	RST
	1								
	2								
	3								
	4								
	5								
	6								
	7								
	8								

Specification:

- 1). Driving:VDD:3.3V 80mA
- 2). Viewing direction: 6 o'clock
- 3). Display mode: TFT 480(RGB)*272
- 3). Operating temp.: -10°C~+60°C
- 4). Storage temp.: -20°C~+70°C
- 5). Control IC: TC76680
- 6). BACKLIGHT :VBL:3.3V IBL:130mA 300cd/m²
- 7). All the raw materials are RoHS compliant
- 8). Interface:SPI

REV	REVISION RECORD	DATE	MODEL NO.	GENERAL TOL:
A	FIRST ISSUE	2018/08/13	模组型号	± 0.25
B			APPROVED BY 审核	PAGE: 1 OF 1
C			CHECKED BY 检查	UNIT: 单位mm
D			LIT 2018/08/13	PROTECTION 三角法



深圳市三元晶科技有限公司
ShenZhen TCCLCD HI-Tech Co., Ltd.