


Customer approval :

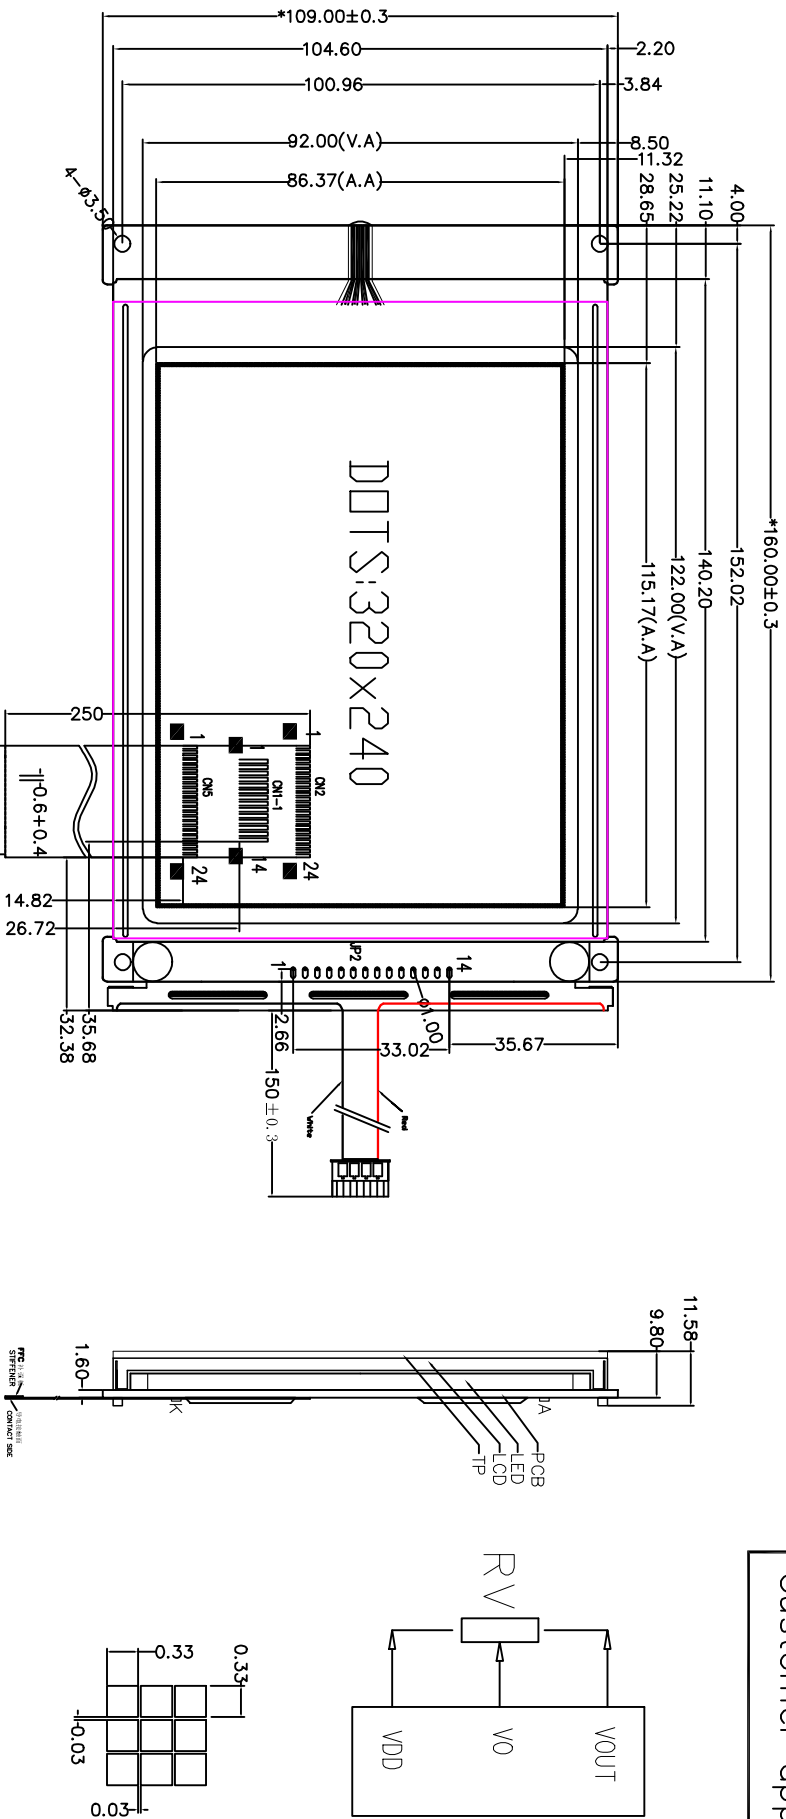

接口, PFC, TP, 背光请选择使用

SPECIFICATION:

- 1). Driving: DOTS:320*240, Duty: 1/240, Bias: 1/12, VDD: 5V, VOUT: -21. 5V, V0: -18. 5V
- 2). VIEWING DIRECTION: 6 0° CLOCK
- 3). Display mode: STN/TRANSFLECTIVE/POSITIVE/BLUE or FSTN
- 3). Operating temp.: -20° C~+70° C
- 4). Storage temp.: -30° C~+80° C
- 5). Control IC: RA8835F3N
- 6). BACKLIGHT type: Edge, White
- 7). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 8). All the raw materials are RoHS compliant

CN1-1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	DO	D1	D2	D3	DISP	FLM	M	LP	CP	VCC	GND	VOUT	VO	FGND

JP2

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	DO	D1	D2	D3	DISP	FLM	M	LP	CP	VCC	GND	VOUT	VO	FGND

CN2

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	RES/ RD	WR	CS	AO	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD	VSS

CN5

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	DO	D1	D2	D3	DISP	FLM	M	LP	CP	VDD	VSS	VOUT	VO	FGND

REV	REVISION RECORD	DATE
A0	First issue	03/15

MODEL NO. SYM320240B7V62
 APPROVED BY
 CHECKED BY
 DRAWING BY
 LAN

深圳市三元晶科技有限公司
 ShenZhen TCC LCD Hi-Tech Co., Ltd.

GENERAL TOL: ± 0.3
 UNIT: mm
 PROJECTION
 角